





# Coreline

## Y-strainer

 Fig.82UD




[www.coreline.dk](http://www.coreline.dk)



# General information

## Main material part list

No.	Name	Material
1	Body	Ductile Iron
2	Bolt	SS316
3	Bonnet	Ductile Iron
4	Plug	SS316
5	Washer	SS316
6	O-Ring	Silicon
6	Screen	SS316

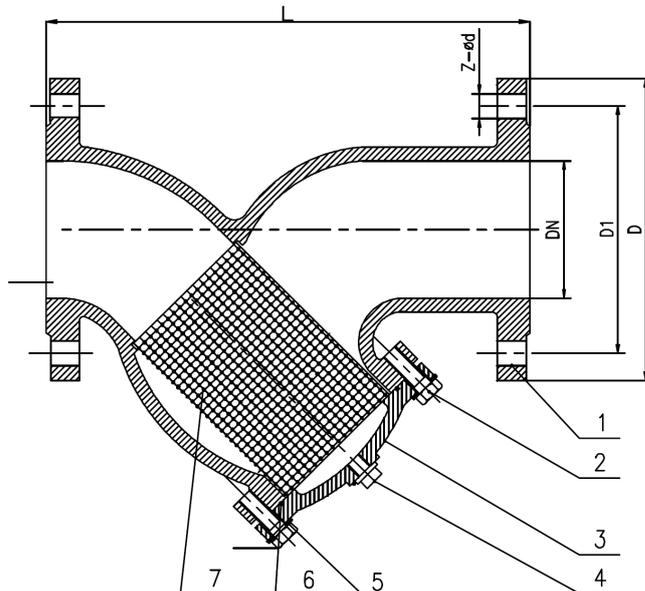

## Technical specification

O-ring material: Silicone as standart.  
EPDM or FPM available upon request.

Face to face dimension:  
Flange drilling standart:  
Test and inspection standart:

DIN3202-F1 EN1092-2  
PN10/PN16. API 598

DN	L	D	D1		D2		Z-Φd	
			PN10	PN16	PN10	PN16	PN10	PN16
50	230	165	125		102		4-Φ19	
65	290	185	145		122		4-Φ19	
80	310	200	160		138		8-Φ19	
100	350	220	180		158		8-Φ19	
125	400	250	210		188		8-Φ19	
150	480	285	240		212		8-Φ23	
200	600	340	295		268		8-Φ23	12-Φ23
250	730	405	350	355	320		12-Φ23	12-Φ28
300	850	460	400	410	370	378	12-Φ23	12-Φ28
350	980	520	460	470	430	438	16-Φ23	16-Φ28
400	1100	580	515	525	480	487	16-Φ28	16-Φ31
450	1200	640	565	585	540	560	20-Φ28	20-Φ31
500	1250	715	620	650	580	610	20-Φ28	20-Φ34
600	1450	840	725	770	690	727	20-Φ31	20-Φ37

# Coreline

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

Coreline A/S

Prins Georgs Kvarter 1, DK-7000 Fredericia  
Phone: +45 92441690

E-mail : mail@coreline.dk

www.coreline.dk